




SNR BEARING CORP.OF AMERICA

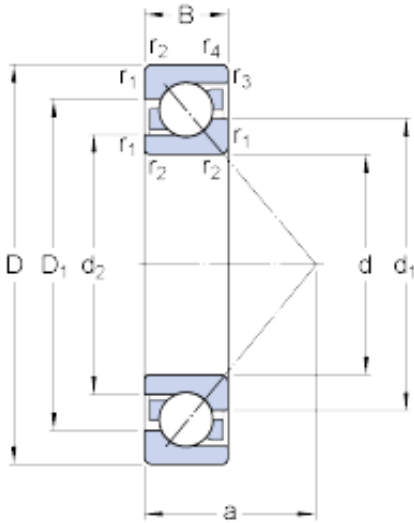

17 mm x 47 mm x 14 mm skf 7303 BEP Single row angular contact ball bearings

Bearing No. 7303 BEP

7303 BEP Bearing 2D drawings and 3D CAD models

Size	47x17x14 mm
Bore Diameter	47 mm
Outer Diameter	17 mm
Width	14 mm
d	17 mm
D	47 mm
B	14 mm
d ₁	28.6 mm
d ₂	22.82 mm
D ₁	36.2 mm
a	20.4 mm
r _{1,2} - min.	1 mm
r _{3,4} - min.	0.6 mm
d _a - min.	22.6 mm
D _a - max.	41.4 mm
D _b - max.	42.8 mm
r _a - max.	1 mm
r _b - max.	0.6 mm
Basic dynamic load rating - C	15.9 kN
Basic static load rating - C ₀	8.3 kN
Fatigue load limit - P _u	0.355 kN
Reference speed	19000 r/min
Limiting speed	19000 r/min
Calculation factor - k _r	0.1



SNR BEARING CORP.OF AMERICA

Calculation factor - k_a	1.6
Calculation factor - e	1.14
Calculation factor - X	0.57
Calculation factor - Y_0	0.52
Calculation factor - Y_1	0.55
Calculation factor - Y_2	0.93
Calculation factor - X	0.35
Calculation factor - Y_0	0.26
Calculation factor - Y_1	
Calculation factor - Y_2	0.57
Category	Angular Contact Ball Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.11
EAN	7316576650420
Product Group	B00308
Enclosure	Open
Flush Ground	No
Rolling Element	Ball Bearing
Number of Rows of Balls	Single Row
Precision Class	ABEC 3 ISO P6
Maximum Capacity / Filling Slot	No
Snap Ring	No
Cage Material	Polymer
Contact Angle	40 Degree
Internal Clearance	C0-Medium
Number of Bearings	1 (Single)
Inch - Metric	Metric
Long Description	17MM Bore; 47MM



SNR BEARING CORP.OF AMERICA

	Outside Diameter; 14MM Width; Open; No Flush Ground; Ball Bearing; Single Row of Balls; ABEC 3 ISO P6; No Filling Slot; No Snap Ring
Category	Angular Contact Ball Bearing
UNSPSC	31171531
Harmonized Tariff Code	8482.10.50.28
Noun	Bearing
Keyword String	Angular Contact
Manufacturer URL	http://www.skf.com
Manufacturer Item Number	7303 BEP
Weight / LBS	0.245
Outside Diameter	1.85 Inch 47 Millimeter
Width	0.551 Inch 14 Millimeter
Bore	0.669 Inch 17 Millimeter
bore diameter:	17 mm
radial static load capacity:	8.3 kN
outside diameter:	47 mm
cage material:	Nylon
overall width:	14 mm
outer ring width:	14 mm
contact angle:	40 °
maximum rpm:	19000 RPM
row type & fill slot:	Single-Row Non-Fill Slot
finish/coating:	Uncoated
internal clearance:	C0
precision rating:	ABEC 3 (ISO Class 6)
closure type:	Open
fillet radius:	1 mm
radial dynamic load capacity:	15.9 kN



SNR BEARING CORP.OF AMERICA

series:	73
d_1	28.6 mm
d_2	22.82 mm
D_1	36.2 mm
$r_{1,2}$ min.	1 mm
$r_{3,4}$ min.	0.6 mm
d_a min.	22.6 mm
D_a max.	41.4 mm
D_b max.	42.8 mm
r_a max.	1 mm
r_b max.	0.6 mm
Basic dynamic load rating C	15.9 kN
Basic static load rating C_0	8.3 kN
Fatigue load limit P_u	0.355 kN
Calculation factor A	0.00141
Calculation factor k_r	0.1
Calculation factor e	1.14
Calculation factor X	0.35
Calculation factor Y_0	0.26
Calculation factor Y_2	0.57
Calculation factor X	0.57
Calculation factor Y_0	0.52
Calculation factor Y_1	0.55
Calculation factor Y_2	0.93
Mass bearing	0.11 kg