




SNR BEARING CORP.OF AMERICA

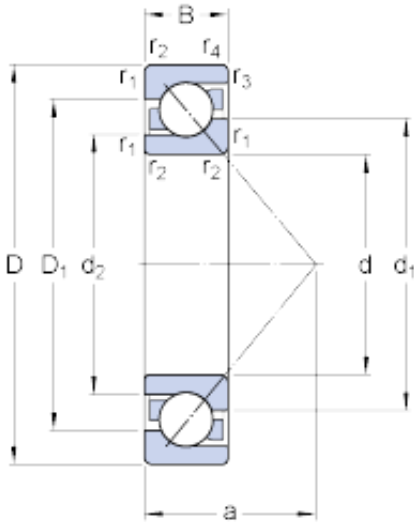

120 mm x 215 mm x 40 mm skf 7224 BGAM
Single row angular contact ball bearings

Bearing No. 7224 BGAM

7224 BGAM Bearing 2D drawings and 3D CAD models

Size	215x120x40 mm
Bore Diameter	120 mm
Outer Diameter	215 mm
Width	40 mm
d	120 mm
D	215 mm
B	40 mm
d ₁	157 mm
d ₂	138.6 mm
D ₁	179.4 mm
a	90 mm
r _{1,2} - min.	2.1 mm
r _{3,4} - min.	1.1 mm
d _a - min.	132 mm
D _a - max.	203 mm
D _b - max.	208 mm
r _a - max.	2 mm
r _b - max.	1 mm
Basic dynamic load rating - C	165 kN
Basic static load rating - C ₀	163 kN
Fatigue load limit - P _u	5.3 kN
Reference speed	3400 r/min
Limiting speed	3600 r/min
Calculation factor - k _r	0.08



SNR BEARING CORP.OF AMERICA

Calculation factor - k_a	1.2
Calculation factor - e	1.14
Calculation factor - X	0.57
Calculation factor - Y_0	0.52
Calculation factor - Y_1	0.55
Calculation factor - Y_2	0.93
Calculation factor - X	0.35
Calculation factor - Y_0	0.26
Calculation factor - Y_1	
Calculation factor - Y_2	0.57
Category	Angular Contact Ball Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	5.9
EAN	7316570926644
Product Group	B00308
Enclosure	Open
Flush Ground	Yes
Rolling Element	Ball Bearing
Number of Rows of Balls	Single Row
Precision Class	ABEC 3 ISO P6
Maximum Capacity / Filling Slot	No
Snap Ring	No
Cage Material	Brass
Contact Angle	40 Degree
Internal Clearance	C0-Medium
Number of Bearings	1 (Single)
Preload	Light
Mounting Arrangement	Universal



SNR BEARING CORP.OF AMERICA

Inch - Metric	Metric
Long Description	120MM Bore; 215MM Outside Diameter; 40MM Width; Open; Yes Flush Ground; Ball Bearing; Single Row of Balls; ABEC 3 ISO P6; No Filling Slot; No Snap Ring
Category	Angular Contact Ball Bearing
UNSPSC	31171531
Harmonized Tariff Code	8482.10.50.28
Noun	Bearing
Keyword String	Angular Contact
Manufacturer URL	http://www.skf.com
Manufacturer Item Number	7224 BGAM
Weight / LBS	12.991
Bore	4.724 Inch 120 Millimeter
Outside Diameter	8.465 Inch 215 Millimeter
Width	1.575 Inch 40 Millimeter
bore diameter:	120 mm
maximum temperature:	257 ° F
outside diameter:	215 mm
cage material:	Brass
overall width:	40 mm
maximum rpm:	2600 rpm
contact angle:	40 °
finish/coating:	Uncoated
row type & fill slot:	Single-Row Non-Fill Slot
fillet radius:	2.1 mm
bore type:	Round
series:	7200
closure type:	Open
weight:	13 lbs



SNR BEARING CORP.OF AMERICA

bearing material:	Steel
manufacturer product page:	Click here
radial dynamic load capacity:	165 kN
manufacturer upc number:	7316570926644
radial static load capacity:	163 kN
d_1	157 mm
d_2	138.6 mm
D_1	179.4 mm
$r_{1,2}$ min.	2.1 mm
$r_{3,4}$ min.	1.1 mm
d_a min.	132 mm
D_a max.	203 mm
D_b max.	208 mm
r_a max.	2 mm
r_b max.	1 mm
Basic dynamic load rating C	165 kN
Basic static load rating C_0	163 kN
Fatigue load limit P_u	5.3 kN
Calculation factor A	0.45
Calculation factor k_r	0.08
Calculation factor e	1.14
Calculation factor X	0.35
Calculation factor Y_0	0.26
Calculation factor Y_2	0.57
Calculation factor X	0.57
Calculation factor Y_0	0.52
Calculation factor Y_1	0.55
Calculation factor Y_2	0.93
Mass bearing	5.89 kg