




SNR BEARING CORP.OF AMERICA

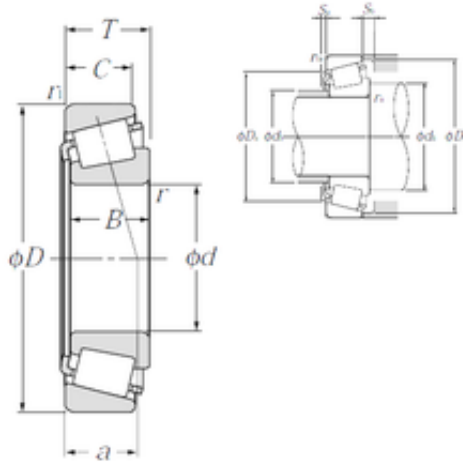

25 mm x 52 mm x 15 mm NTN 4T-30205 Single row tapered roller bearings

Bearing No. 4T-30205

4T-30205 Bearing 2D drawings and 3D CAD models

Size	25x52x16.25 mm
Bore Diameter	25 mm
Outer Diameter	52 mm
Width	16,25 mm
d	25 mm
D	52 mm
T	16,25 mm
B	15 mm
C	13 mm
ra1 max.	1 mm
a	12,5 mm
r min.	1 mm
r1 min.	1 mm
da min.	30,5 mm
Da min	44 mm
Da max.	46,5 mm
db max.	31 mm
Db min.	48 mm
ra max.	1 mm
Sa	2 mm
Sb	3 mm
Weight	0,154 Kg
Basic dynamic load rating (C)	31,5 kN
Basic static load rating (C0)	34 kN
(Grease) Lubrication Speed	7 300 r/min



SNR BEARING CORP.OF AMERICA

(Oil) Lubrication Speed	9 800 r/min
Calculation factor (e)	0,37
Calculation factor (Y0)	0,88
d1	38 mm
rs min	1 mm
r1s min	1 mm
e	0.37
Y2	1.6
Y0	0.88
Mass	0.15 kg
ISO 355 reference	T3CC025
Dynamic load, C	31.5 kN
Rating life coefficient, A2	1.4
Static load, C0	34 kN
Fatigue limit load, Cu	4.15 kN
Nlim (oil)	9,800 rpm
Nlim (grease)	7,300 rpm
Min operating temperature, Tmin	-40 ° C
Max operating temperature, Tmax	120 ° C
Characteristic cage frequency, FTF	0.42 Hz
Characteristic rolling element frequency, BSF	5.82 Hz
Characteristic outer ring frequency, BPF0	6.7 Hz
Characteristic inner ring frequency, BPF1	9.3 Hz
da max	31 mm
db min	30.5 mm
Da max	46.5 mm
Db min	48 mm
Ca min	2 mm



SNR BEARING CORP.OF AMERICA

Cb min	3 mm
ra max	1 mm
r1a max	1 mm
Category	Roller Bearings
Inventory	4.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
UNSPSC	31000000
Weight / Kilogram	0
EAN	4547359003178
Product Group	B04336